



# F series

## AIR NOZZLE



1/4F-SS-stainless steel

### DESIGN FEATURES

- Controlled wide uniform distribution and high impact coverage of compressed air
- Can be mounted individually or side-by-side for greater coverage
- Efficient air flow rates with unique eductor feature
- 1/4" male connection BSPT
- Up to 2dB quieter than competing designs



- Rugged construction of ABS plastic or Aluminium Alloy material or 316 stainless steel
- Maximum operating pressure 7 bar

### SPRAY CHARACTERISTICS

**Spray pattern:** Fan  
**Air Flow Rates:** 10 to 35 Nm<sup>3</sup>/h at 1 bar to 5 bar

### FLOW SPECIFICATION

| Male BSPT | Model  | Air Capacity ( Nm <sup>3</sup> / h ) @BAR |    |    |    |    | Material        |
|-----------|--------|---|----|----|----|----|-----------------|
|           |        | 1   | 2  | 3  | 4  | 5  |                 |
| 1/4"      | F-ABS  | 10  | 15 | 20 | 28 | 35 | Plastic         |
| 1/4"      | F-ALMA | 10  | 15 | 20 | 28 | 35 | Aluminium       |
| 1/4"      | F-SS   | 10  | 15 | 20 | 28 | 35 | Stainless steel |

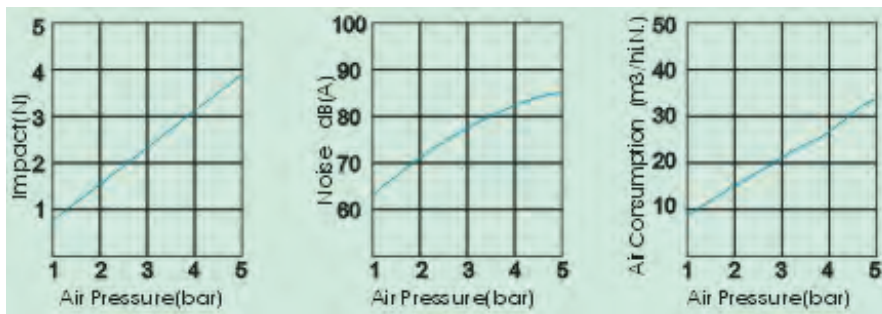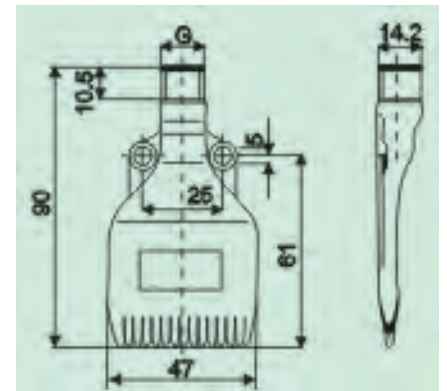

1/4F-ABS