




WA series

Rinsing & Washing Nozzles

FEATURES

- Non Clog through hole
- 300 degrees wide spray angle
- Durable with no maintenance
- High impact
- No moving parts

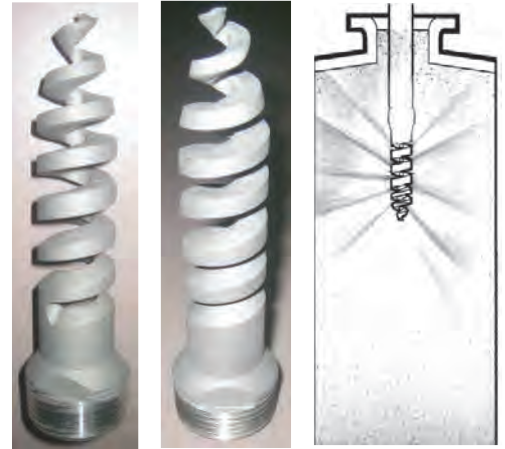


WA Series

APPLICATION

- Tank Scrubbing and rinsing for any types of tank
- Descaling

Spray Scrubbing / Rinsing Coverage

Spraying @ 3 Bar			
Pipe Size	Nozzle Number	Scrubbing Diameter (mm)	Rinsing Diameter (mm)
3/8 inch	WA 14	460	1200
	WA 18	910	2100
1 inch	WA 1	2400	6100
2 inch	WA 2	3400	7600
3 inch FL	WA 3	4200	8800

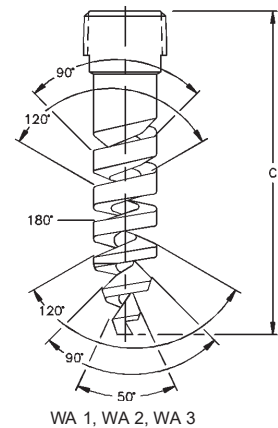

WA 1, WA 2, WA 3

Flow Characteristics

WA 300° Spray Angles, 3/8" and 1" Pipe Sizes, BSP or NPT or Flange (3 inch)																	
Male Pipe Size	Nozzle Number	Spray Angles	K Factor	LITERS PER MINUTE								(mm) Orifice Dia	Free Pass. Dia.	Dimension (mm)			Wt (g)
				0.7 bar	1 bar	2 bar	3 bar	4 bar	5 bar	10 bar	15 bar			A	B	C	
3/8	WA 14	300	185	15.4	18.5	26.1	32.0	36.9	41.3	58.4	71.5	5.59	3.30	730	175	496	
	WA 18	300	376	31.5	37.6	53.2	65.1	75.2	84.1	119	146	7.87	3.30				
1	WA 1	300	116	97.2	116	164	201	232	260	368	450	14.2	5.08			130	298
2	WA 2	300	638	534	638	902	1110	1276	1430	2020	2470	38.5	9.70			158	355
3	WA 3	300	1170	976	1170	1650	2020	2340	2610	3690	4531	46.2	10.6			187	394

Material : 316 stainless steel